

LED Undercabinet
180517, 180518, 180519

Features

All purpose direct wire LED undercabinet light. Low profile applications include kitchens, study areas, displays and computer stations. Standard knockouts are located on top, back or ends for direct connection. A direct wire UL listed connector is included and is suitable for 3/8" flexible conduit or 3 wire Romex.



Construction

Housing is die-formed of 22-gauge steel. Separate hinge service tray allows for easy installation and snaps into position without hardware. Power connections are made inside service tray.

Finish

All exposed metal parts are post painted lighting grade white.

Diffuser

Smooth white acrylic diffuser snap-fits into housing.

Electrical

Input 120 VAC/60 Hz.
Compatible with TRIAC and ELV dimmers.
On/off switch included.

LED



Integrated LED in 3000K color temperature.
Rated 50,000 hrs., 90 CRI.

Certification

Fixtures are cETLus listed for indoor damp locations.

Warranty

Limited warranty. This fixture guaranteed to be free from defects in materials and workmanship for a period of 5 years from date of purchase.

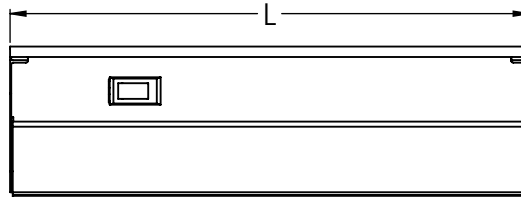

Specifications and dimensions
subject to change without notice.

Ordering Information:

Size	White	LED	Lumens	CCT	L	W	D
12 in.	180517	5W	210	3000K	12"	3-1/2"	1-1/8"
18 in.	180518	9W	420	3000K	18"	3-1/2"	1-1/8"
24 in.	180519	9W	420	3000K	24"	3-1/2"	1-1/8"