

LED Wraparound 294542

Features

This low profile, clean appearance, surface mounted wrap provides a wide distribution of light with a frosted white prismatic lens. It can be used in various applications including offices, corridors, garages, kitchens and public spaces. Fixture mounts to standard junction box (not included).

Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Power supply connections can be made inside the fixture wire way or in a junction box (not included).

Finish

Housing is finished in lighting grade white baked gloss enamel paint.

Diffuser

Frosted white prismatic diffuser is made of engineered LED acrylic material.

Electrical

Input 120-277 VAC / 60 Hz.
Not compatible with dimmers.

Lamping

Integrated LED modules capable of producing:
43W, 4400 source lumens.
4000K (CCT). Rated for 50,000 Hrs., 80 CRI.



Certification

cETLus listed for damp locations.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions subject to change without notice.

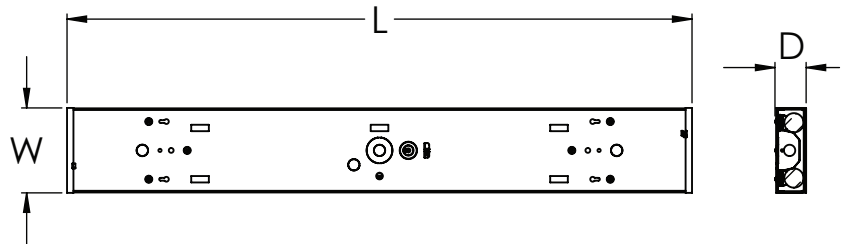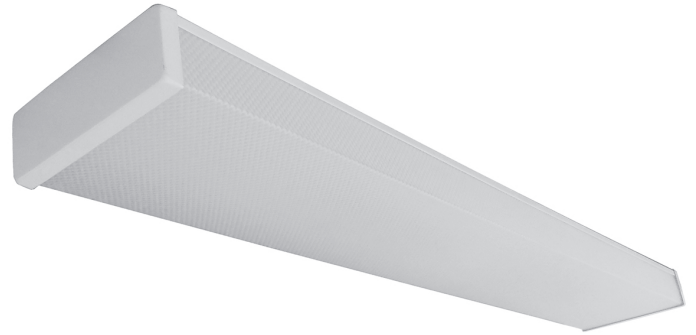

Ordering Information:

Cool White	LED	Source Lumens	CCT	L	W	H
294542	43W	4100	4000K	48-11/16"	7-9/16"	2-11/16"

Distributed by: