



Model ZE00803  
SKU# 402454  
USN# 334021009

Non-submersible  
**1/10 HP Transfer Pump**

- Multi-purpose pump constructed of corrosion-resistant brass
- Drain water from boats, waterbeds, clogged sinks, aquariums, washing machines, stock tanks, utility sinks and more
- Oil-free motor is safe to use around fish and plants
- Removes water down to 1/8" with suction strainer
- 115V motor with thermal overload protection
- Includes suction hose, suction strainer, replacement impeller and brush
- 3/4" Garden hose threaded connection and 6' power cord




**Performance**

Model No.	HP	Discharge Flow (GPH)						Max. lift
		0'	10'	20'	30'	40'		
ZE00803	1/10	360	318	264	198	132		42'

Application	
The non-submersible transfer for general water transfer	
Voltage	115
Amps	1.8
Hertz	60
Phase	Single
RPM	N/A
Motor type	Single-phase series motor
Insulation	Class B
Circuit requirments	10 AMP
Duty rating	Continuous*
Shaft seal	Lip seal
Motor Shaft	Stainless steel
Upper motor bearing	Ball bearing
Lower motor bearing	Ball bearing
Cooling	Air cooled
Motor protection	Auto reset thermal overload protector
*For continuous, the pump is not allowed to run dry	
Pump Specifications	
Discharge size	3/4 in. garden hose thread
Cord Length	6'
Cord type	SJTW 18AWG/3C, UL list
Pump body	Brass
Impeller material	Rubber
Gasket	Seal paper
Solids handling	0" spherical
Liquid temp.range	32-95°F
Operation	Non-Automatic
Fasteners	Stainless steel
Maximum flow rate	6 GPM
Maximum head	42 ft

## Performance

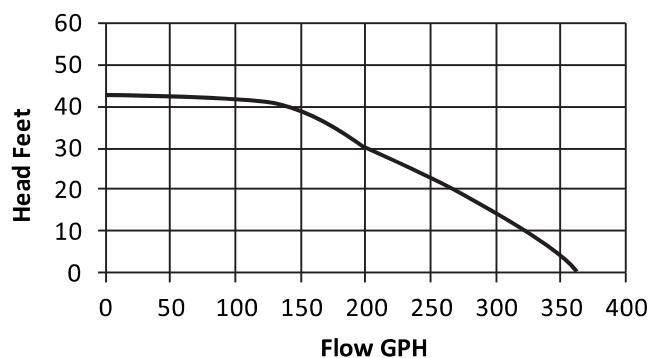

## Dimensions

