

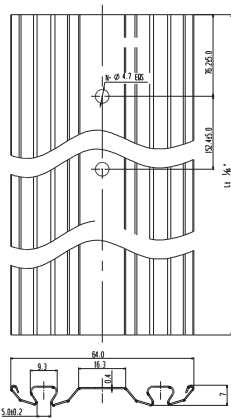
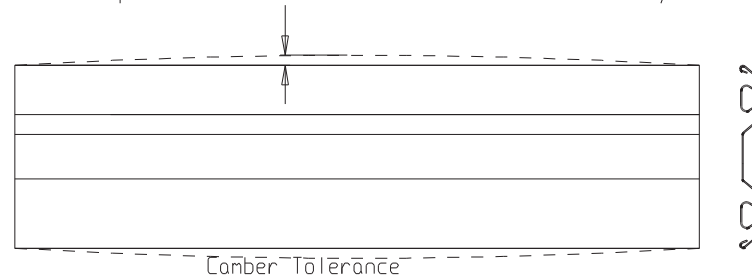


.010" (0.25mm) per 12in (305mm) Max Camber Either Way

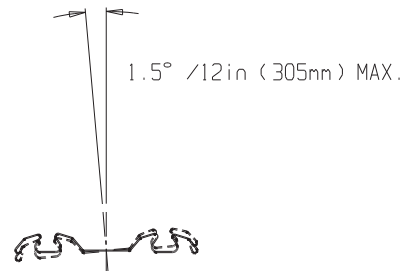

.010" (0.25mm) per 12 in (305mm) Max Bow Either Way

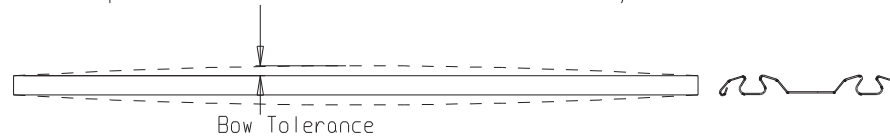

MAT'L	L	N	iten(White/Silver/Gold)
Steel	48"	8	145BT048W1PT/145BT048SIIP/145BT048GLIP
Steel	60"	10	145BT060W1PT/145BT060SIIP/145BT060GLIP
Steel	72"	12	145BT072W1PT/145BT072SIIP/145BT072GLIP
Steel	96"	16	145BT096W1PT/145BT096SIIP/145BT096GLIP
Steel	144"	24	145BT144W1PT/145BT144SIIP/145BT144GLIP

ONWARD Div of Richelieu

TOLERANCE UNLESS NOTED: X/XX±1/64 X. mm±.5 .XX"±.010 .Xmm±.2 .XXX"±.005 .XXmm±.1 ANGLES±2°	MATERIAL: .4mm (.016 in) C.R.S. FINISH: PRE-PAINTED	THIS DOCUMENT IS THE PROPERTY OF ONWARD AND IS FURNISHED ON THE CONDITION IT IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART, OR TO BE USED FOR MANUFACTURE FOR ANYONE OTHER THAN ONWARD WITHOUT ITS WRITTEN CONSENT.
--	--	--

TITLE: Bypass Door Bottom Track